



Virtual Host

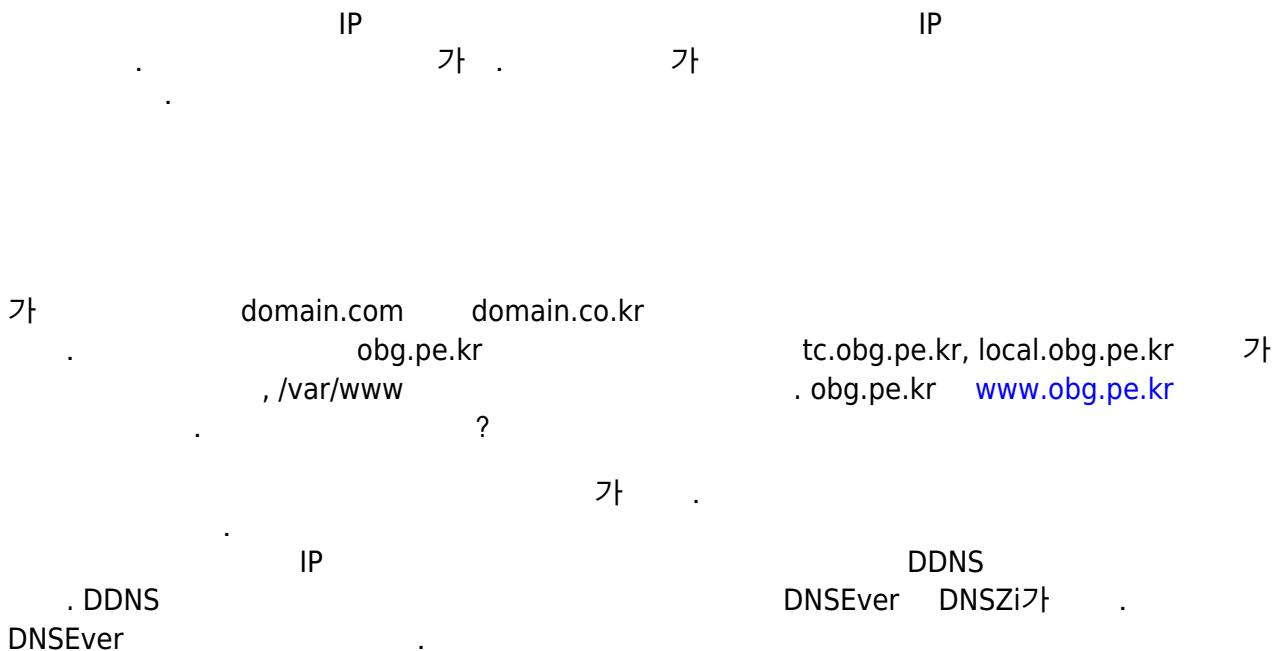

DNSEver

DNSEver(<http://kr.dnsever.com>)

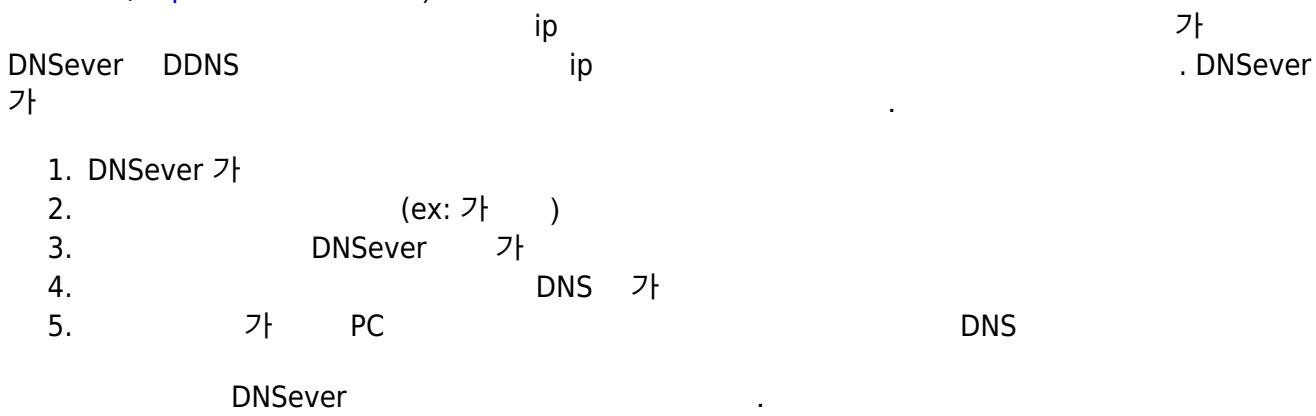

Virtual Host

1. /etc/apache2/apache2.conf

가 .

Servername "obg.pe.kr"

2. /etc/apache2/sites-available()

. (ex: obg.pe.kr)

3. obg.pe.kr

<VirtualHost *:80>

```

ServerAdmin vfinger@naver.com
ServerName obg.pe.kr
ServerAlias www.obg.pe.kr
DocumentRoot /var/www/xe
</VirtualHost>

<VirtualHost *:80>
ServerAdmin vfinger@naver.com
ServerName local.obg.pe.kr
DocumentRoot /var/www
</VirtualHost>

<VirtualHost *:80>
ServerAdmin vfinger@naver.com
ServerName tc.obg.pe.kr
DocumentRoot /var/www/tc
    <Directory /var/www/tc>
        Options FollowSymLinks
        AllowOverride All
    </Directory>
</VirtualHost>

```

4. \$ sudo a2ensite obg.pe.kr

5. \$ service apache2 restart (\$ service apache2 reload)

```

www.obg.pe.kr, local.obg.pe.kr, tc.obg.pe.kr
obg.pe.kr
    . default           DocumentRoot /var/www/xe
    . (     default     a2dissite      )

```

- 가

From:
<http://obg.co.kr/doku/> - OBG WiKi

Permanent link:
http://obg.co.kr/doku/doku.php?id=linux:virtual_host

Last update: **2020/11/29 14:09**

